Mounting to the Windshield


1 Assemble Suction Cup Bracket



2 Adjust Suction Cup Bracket to ensure your RAD 380 has a level view of the road




Attach Suction Cup Bracket to Windshield




Attach RAD 380 to Suction Cup Bracket




Mounting to the Dashboard

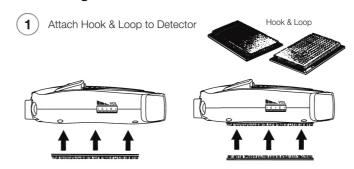

2 Attach Detector to Dashboard Surface



3 Connect Detector to 12V Power Source





RADAR/LASER DETECTOR



QUICK START GUIDE

RAD 380 Features

THANK YOU! For purchasing the new COBRA® RAD 380

Full manual available at: www.cobra.com




FCC ID-BBORADD3. THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTEFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRED OPERATION.


FCC NOTE: Modifications not expressly approved by the manufacturer could void the user's FCC granted authority to operate the equipment.

Cobra® and the snake design are registered trademarks of Cobra Electronics Corporation, USA. Cobra Electronics Corporation™ is a trademark of Cobra Electronics Corporation, USA. Other trademarks and trade names are those of their respective owners.

Windshield Mount Slot Windshield Mount Release Speaker Brightness Sensitivity Display



Volume Up/Down/Power





Windshield Suction Cup Bracket

12V Power Cord